




澳标 针式绝缘子  
PIN INSULATORS (AS Standard Type)

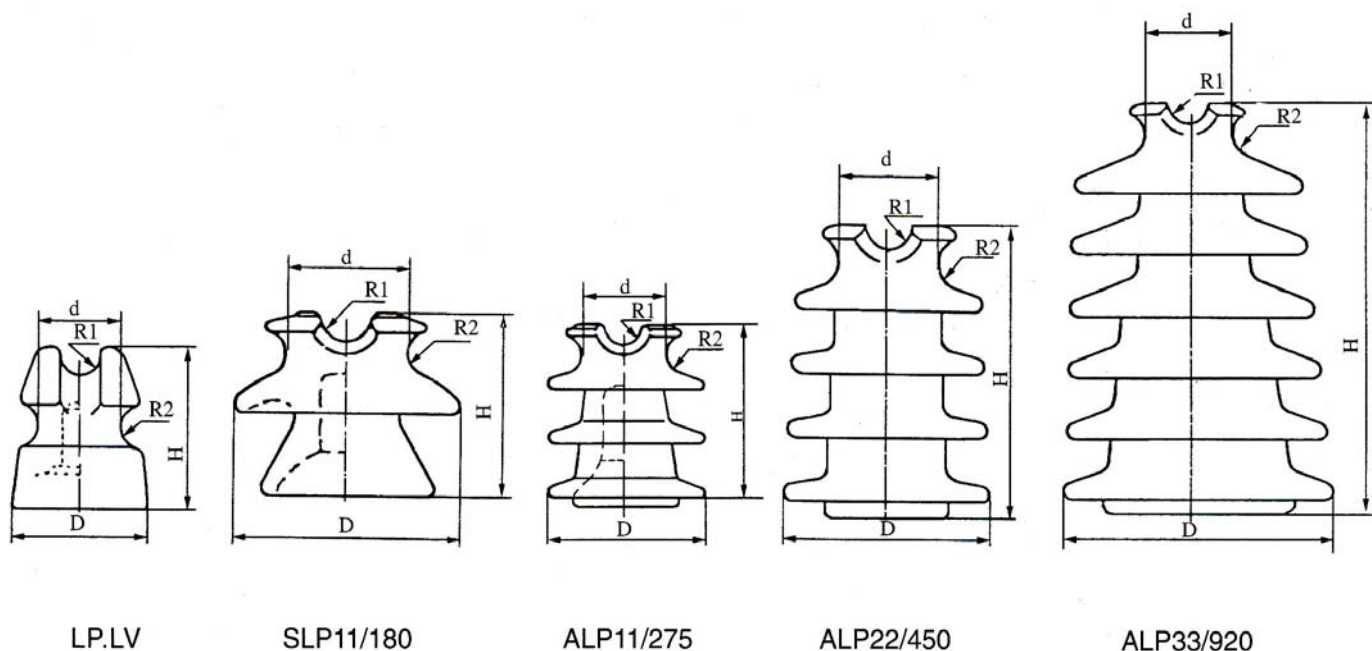

AS Class		LP.LV	SLP11/180	ALP11/275	ALP22/450	ALP33/920
Normal Voltage,kV		—	11	11	22	33
Creepage Distance,mm		—	180	275	450	920
Dimensions,mm	H	91	107	168	200	320
	D	82	140	136	160	240
	d	48	76	76	76	76
	R1	11	16	16	16	16
	R2	11	13	13	16	16
Thread Pattern		A	A	C	C	C
Cantilever Strength,kN		7	7	7	11	11
Power Frequency Withstand Voltage	Dry,kV	—	60	60	—	260
	Wet,kV	—	32	32	50	70
Critical Impulse Withstand,kV		—	95	95	150	200
Power Frequency Puncture Voltage,kV		—	95	95	130	130
Net Weight,Approx.,kg		0.8	1.2	1.8	—	14.6

**NOTE:**

- Standard:**comply with the Australian Standard
- Colour:**the glaze colors of the insulators are brown or light gray.
- Specification:**These pin type insulators are furnished with cemented zinc thimbles designed to fit the pins specified in AS 1154 Part 2.